

## Pressure gauge for refrigeration systems with case in stainless steel



Suitable for all gaseous and liquid media that will not obstruct the pressure system or attack copper alloy parts.  
Especially designed for difficult conditions of use, as there are vibrations or quick changes of pressure.  
Also useful for adverse ambients. Manufactured according to EN 837-1 standards.



### STANDARD PARAMETERS

Design: EN 837-1
Closing: Sealed ring
Mounting: See attached diagrams A, B, C or D
Threaded connection: $\varnothing 63$ : 1/4" BSP; $\varnothing 100$ : 1/2" BSP (UNE-EN 10226-1)
IP protection: IP65 (EN 60529 / IEC 529)
Accuracy: Class 1.6
Pressure limits:
Static: 3/4 end of scale
Oscillating: 2/3 end of scale
Maximum: Full scale for a short period of time
Temperature limits:
Environment: -20+50°C
Fluid: 80°C
Range: -1+12 or -1+24 Bar
Scale: Bar/R22/R134a/R404a/R507
Subdivision: According to standard EN 837-1
Antivibration fluid: Glycerine 99.8%
Sensor element: Bourdon tube ("C" form)
Overtemperature relief system: Upper plug


### MATERIALS

Case and ring: AISI 304 Stainless steel
Bourdon tube and moving parts: Cu Alloy
Threaded connection: Brass
Visor: Polycarbonate
Dial: White laquered aluminum
Pointer: Black laquered aluminum
Welding: Cu-Sn
Overtemperature relief plug: Neoprene


### Application:

- Refrigeration
- Air conditioning
- Food industry


### A Bottom

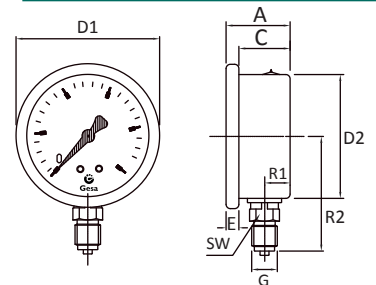


### B Back

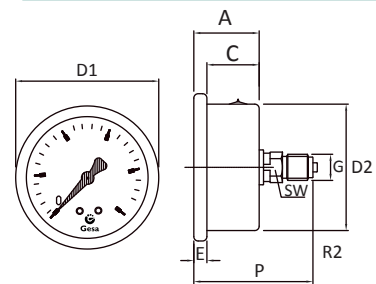

### C Bottom with back flange

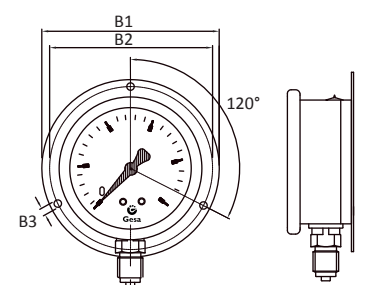

### D Back with frontal flange

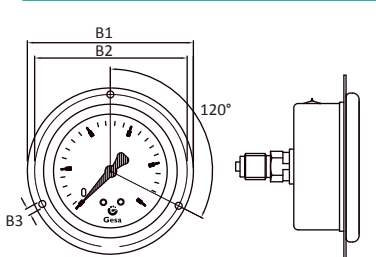

### DIMENSIONS (mm)

### WEIGHT (g)

DN	Mounting	R1	A	C	D1	E	D2	G	R2	SW	P	B1	B2	B3	WEIGHT (g)
$\varnothing 63$	A/C	10	29	23	68	6	61	1/4" BSP	56	14	-	86	80	3,5	180
$\varnothing 63$	B/D	-	29	23	68	6	61	1/4" BSP	56	14	58	86	80	3,5	180
$\varnothing 100$	A/C	12	37	29	109	8	99	1/2" BSP	87	21	-	132	124	5	607
$\varnothing 100$	B/D	-	37	29	109	8	99	1/2" BSP	87	21	77	132	124	5	607

### How to order

#### 1. Case diameter

$\varnothing 63$     $\varnothing 100$

#### 2. Pressure range (Bar)

-1+12   -1+24

#### 3. Pressure scale

Bar/R22/R134a/R404a/R507

#### 4. Mounting

A   B   C   D

#### 5. Threaded connection

1/4" BSP   1/4" SAE   1/2" BSP

#### 6. Connection material

Brass

#### 7. Antivibration fluid

Glycerine 99.8%

#### 8. Calibration certificate traceable to ENAC

7 point certificate  
Without certificate

M0501 - 

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

[www.termometros.com](http://www.termometros.com)



+34 94 676 63 64

info@termometros.com

Order it online!