

DIGITAL THERMOMETER

Instruction manual

Model:SH-019

1.Description of parts

Fig. 1

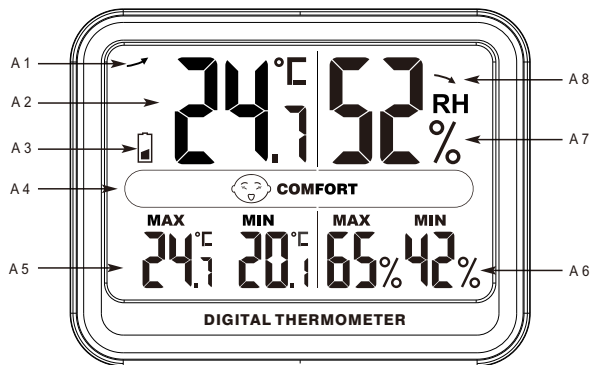


Fig. 2

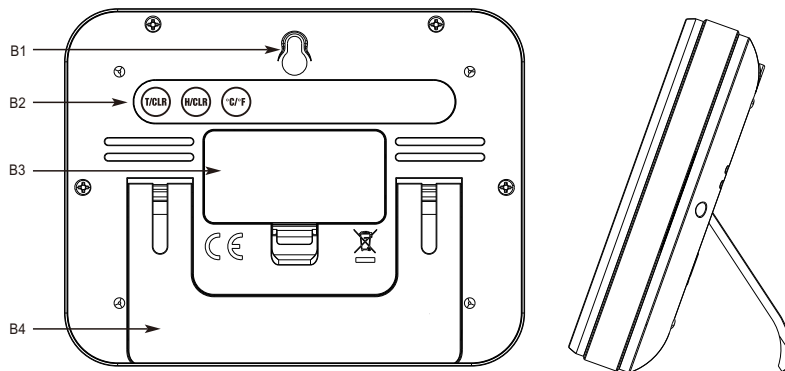


Fig. 1

- A1: Temperature trend
- A2: Temperature display
- A3: Low power symbol
- A4: Comfortable index
- A5: Maximum and minimum temperature
- A6: Maximum and minimum humidity
- A7: Humidity display
- A8: Humidity trend

Fig. 2

- B1: Wall mounting hole
- B2: Buttons
- B3: Battery cover
- B4: Stand (fold out)

2.Specifications

- Measuring range:Temperature -50°C~+70°C(-58°F~158°F)
Humidity 1%~99%;
- Accury:Temperature +/1°C(2°F) between 0°C to 50°C,
otherwise +/2°C(4°F),
Humidity +/5%;
- Power Consumption:2 X 1.5V AAA(include)
- Low battery index:2.6V;
- Temperature and humidity trend;
- Maximum and minimum temperature display.

3. Thermometer and hygrometer

- If the measure values above the range,then temperature display "HH.H",humidity display "HH%".
- If the measure values below the range,then temperature display "LL.L",humidity display "LL%".

3.1 Maximum/Minimum function

- The maximum and minimum values are display on the screen.
- Press the T/CLR button to clear the memory of temperature.
- Press the H/CLR button to clear the memory of humidity.

3.2 Setting of the temperature unit

- Press the °C/°F button to change between °C (Celsius) or °F (Fahrenheit) as temperature unit.